


Correct setting of the coating unit

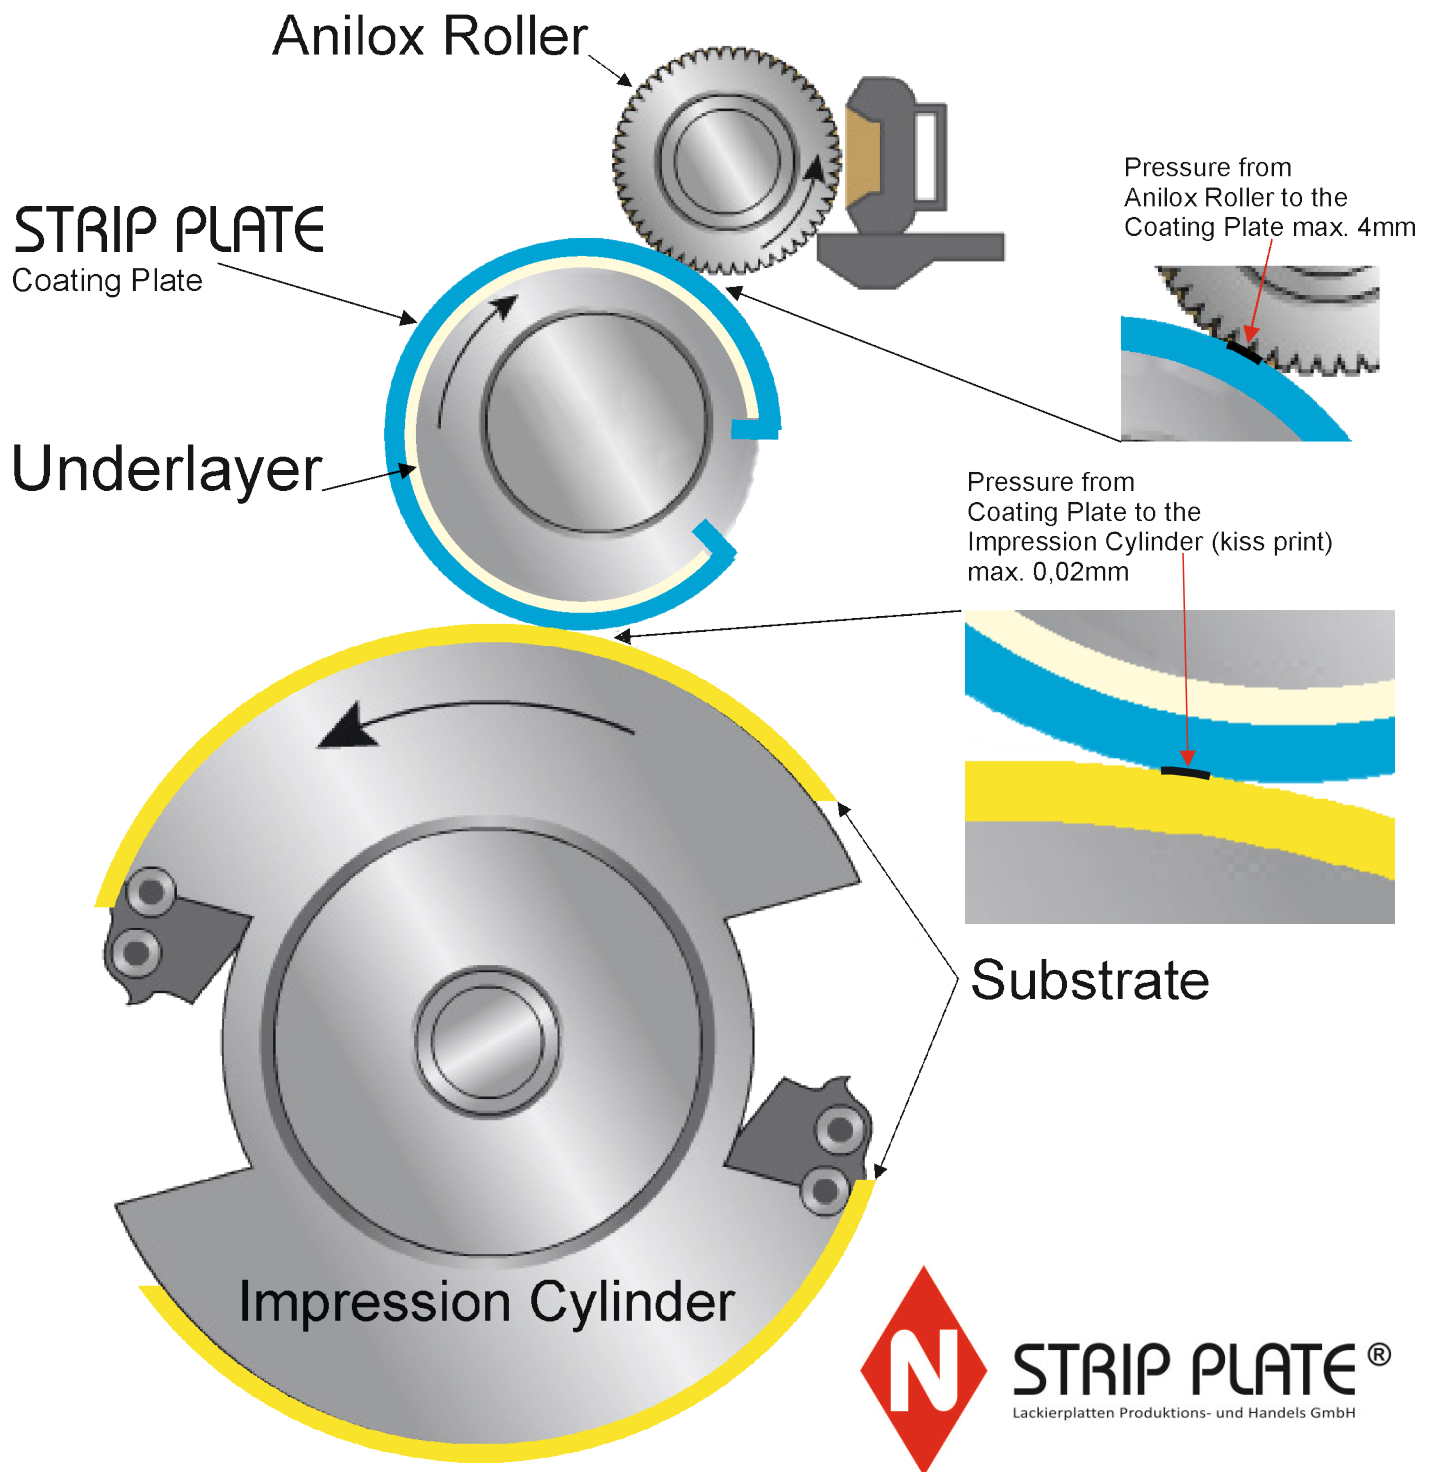

Correct setting of the coating unit

1. The Anilox Roller must be clean
2. The coating plate should be clamped with a maximum of 30 N/cm, optimal 25 N/cm.
3. Pressure from Anilox Roller to the Coating Plate max. 4mm.
4. Pressure from Coating Plate to the Impression Cylinder (kiss print) max. 0,02mm.
5. Always observe the correct underlayer thickness, see at the machine manual.

Information without guarantee

STRIP PLATE®
Lackierplatten Produktions- und Handels GmbH
A-3950 Dietmanns/Gmünd, Dechant Hauer Straße 28
Tel. +43 (0) 2852 / 20230, Fax +43 (0) 2852 / 20250
e-mail: info@strip-plate.at www.strip-plate.at